

ParkAdvance™ Entry

Smart, Reliable, Future-proof

The ParkAdvance™ Entry has been engineered to offer an outstanding combination of ease of consumer use, advanced consumer features, exceptional reliability, robust durability and great aesthetics. ParkAdvance™ Entry terminals are also easy to configure and manage using our integrated ParkiD™ system software.



a dφnnoiq
company

ParkAdvance™ Entry

Specifications

Display

Diagonal screen size: 7 inch Wide

Backlight

Colours: 16,2 million

Resolution: 800 x 480

Type: LCD

Power saving mode

Communication

Optional 2-way voice intercom

Optional 1-way video intercom

Connection

TCP-IP

Dimensions

Packaging type: FSC approved re-usable pallet box

Product weight:

Terminal: 40kg

Product dimensions (WxDxH): 600mm x 500mm x 1304mm

Power

Power supply 230V

Cooling fan: 230V

Heater: 400W – 230V

Safety

1/ 2-channel detector 230V

Tamper alarm

Door contact

Euro cylinder lock

Software

WPS ParkiD™

WPS ParkiD™ Cloud

Identifiers

Deister PRD4

MIFARE

NEDAP

ANPR

Credit card / debit card

Certifications

PCI-DSS / PA-DSS

Green specification


20% energy reduction due to standby functionality

Thermostat standard temp 15°C

FSC approved ticket paper

Standard

- Aluminium housing
- 7" LCD full-colour display in entry/exit terminals
- Intercom prepared or installed
- Modular design
- Standard cabinet colour: RAL 7021

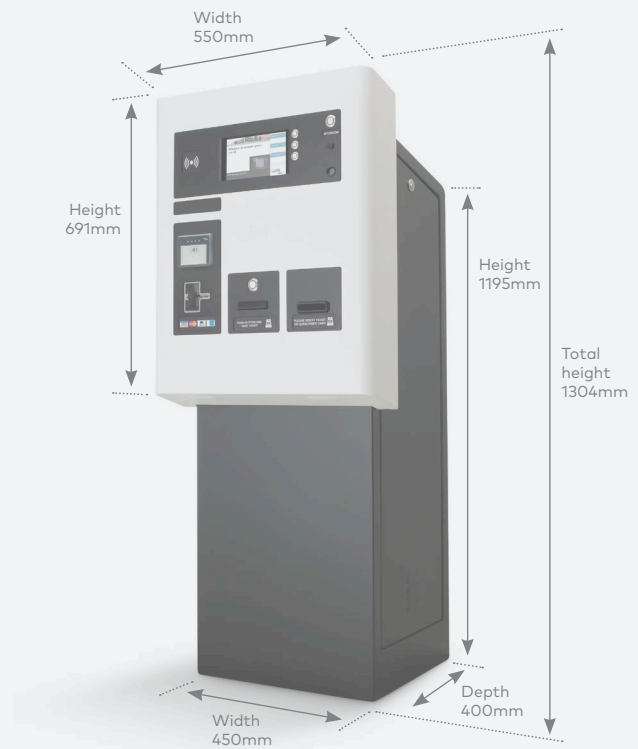

Optional

- Face plate is available in different colours
- Automatic Number Plate Recognition
- Various proximity readers
- Integration of 3rd party readers
- Country specific chip & pin
- Various credit card readers possible
- Receipt printer / lost ticket printer
- Additional plinths 120mm / 320 mm
- LED ticket mouth

