

ParkAdvance Exit

Smart, Reliable, Future-proof

The ParkAdvance™ Exit has been engineered to offer an outstanding combination of ease of consumer use, advanced consumer features, exceptional reliability, robust durability and great aesthetics. ParkAdvance™ Exit terminals are also easy to configure and manage using our integrated ParkiD™ system software.



a dφnnoiq
company

ParkAdvance™ Exit

Specifications

Display

Diagonal screen size: 7 inch Wide
Backlight
Colours: 16,2 million
Resolution: 800 x 480
Type: LCD
Sleep mode reduces 20% energy

Communication

Optional 2-way voice intercom
Optional 1-way video intercom

Connection

TCP-IP

Dimensions

Packaging type: FSC approved re-usable pallet box
Product weight:
Terminal: 40kg / 88lbs
Product dimensions (WxDxH): 600mm x 500mm x 1304mm

Payment methods

Contactless
Pin
Credit card / Debit card

Power

Power supply 230V / 110V
Cooling fan: 230V / 110V
Heater: 400W – 230V / 110V

Safety

1/ 2-channel detector 230V / 110V
Tamper alarm
Door contact
Euro cylinder lock

Software

WPS ParkiD™
WPS ParkiD™ Cloud

Departure


Deister PRD4
MIFARE
NEDAP
Receipt printer: X56

Certifications

PCI-DSS / PA-DSS
Green specification
20% energy reduction due to standby functionality
Thermostat standard temp 15°C
FSC approved receipt paper

Standard

- Aluminium housing
- 7" LCD full-colour display in entry/exit terminals
- Intercom prepared or installed
- Modular design
- Standard cabinet colour: RAL 7021

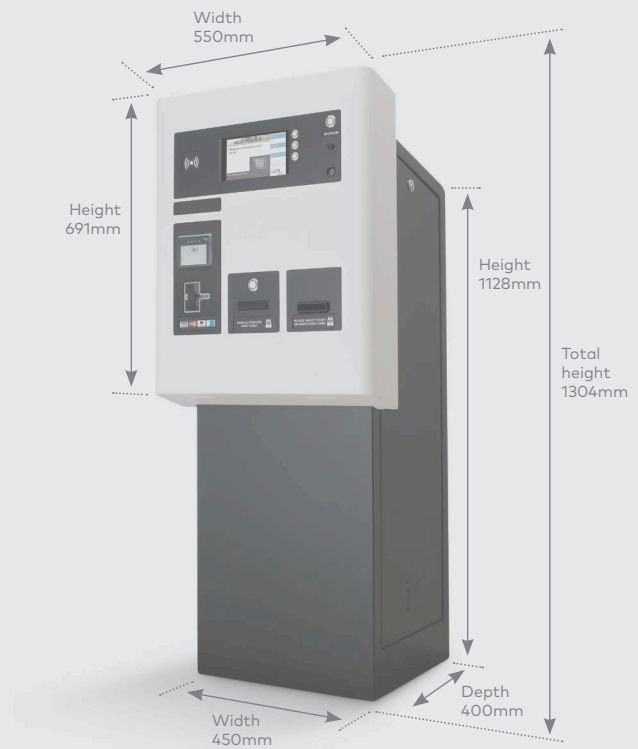

Optional

- Face Plate available in different colours
- Automatic Number Plate Recognition
- Barcode insertion / 2D scanner type - Exit
- Passcard acceptor (TAU)
- LED lit ticket mouth
- Built in intercom
- Proximity readers: Deister, Nedap
- Integration of 3rd party readers
- Cashless exit paystation ready for credit card reader
- Credit card reader
- Plinth 120mm / 380mm
- Built in Switch

